



# DRM65



## 6.5" High Performance Mid-Range

### CARACTERÍSTICAS

- Cable de la Bobina: Cobre
- Bobina: Poliamida
- Magneto: Ferrita
- Canasta: Acero Estampado
- Cono: Papel
- Orilla del Cono: Tela


### ESPECIFICACIONES

- Diametro Nominal de la Canasta: 6.5"
- Impedancia Nominal: 4Ω
- Poder Nominal: 150
- Poder Dinámico: 500
- Resonancia: 119Hz
- Sensibilidad: 97.2
- Diametro de la Bobina: 1.5"

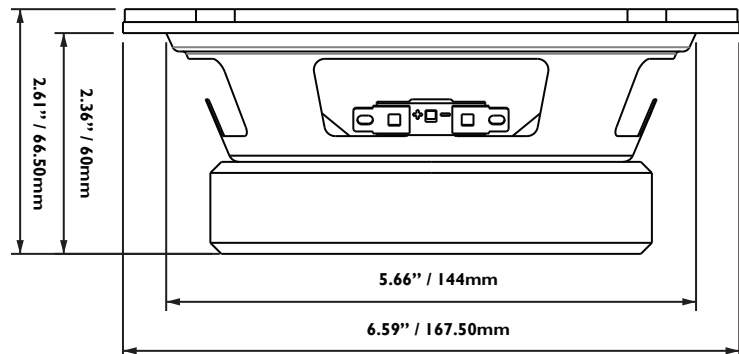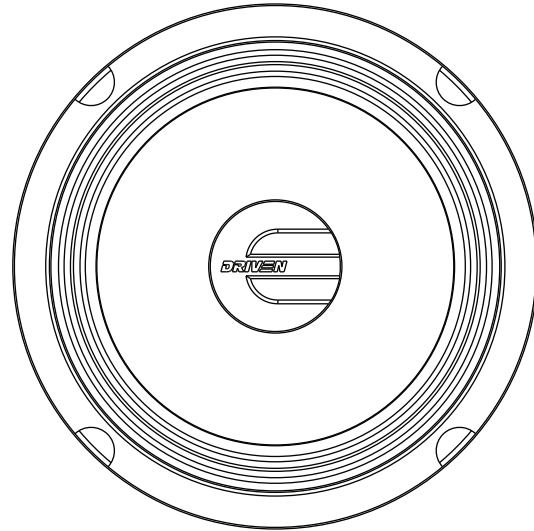

### T/S Parameters

- |   |            |
|---|------------|
| ■ Resonant Frequency (Fs)                   | 91.6Hz     |
| ■ DC Resistance (Re)                        | 8.5        |
| ■ Coil Inductance (Le)                      | 0.00mH     |
| ■ Mechanical Q (Qms)                        | 4.67       |
| ■ Electromagnetic Q (Qes)                   | 0.70       |
| ■ Total Q (Qts)                             | 0.61       |
| ■ Compliance Equivalent Volume (Vas)        | 7.2        |
| ■ Mechanical Compliance of Suspension (Cms) | 0.29mm/N   |
| ■ BL Product (BL)                           | 5.2 N/A    |
| ■ Diaphragm Mass inc. Airload (Mms)         | 10.4 grams |

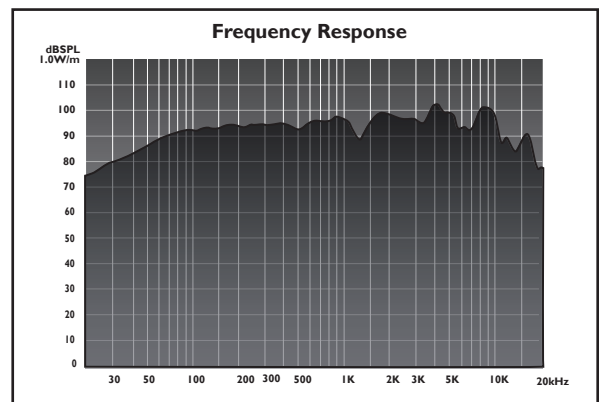

Driven is a Registered Trademark of DB Research L.L.P. | Designed and Engineered in the U.S.A.



# DRM65



## 6.5" High Performance Mid-Range

### FEATURES

- Voice Coil Wire: Copper
- Coil: Polyimide
- Magnet: Ferrite
- Basket: Stamped Steel
- Cone: Paper
- Cone Edge: Cloth


### SPECIFICATIONS

- Nominal Basket Diameter: 6.5"
- Nominal Impedance: 4Ω
- Nominal Watts: 125
- Dynamic Watts: 375
- Resonance: 119Hz
- Sensitivity: 97.2
- Voice Coil Diameter: 1.5"

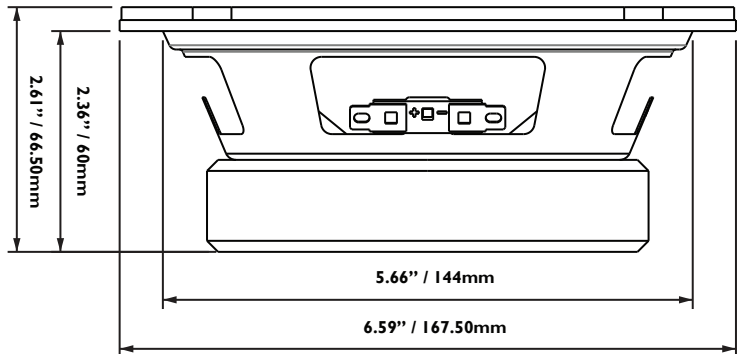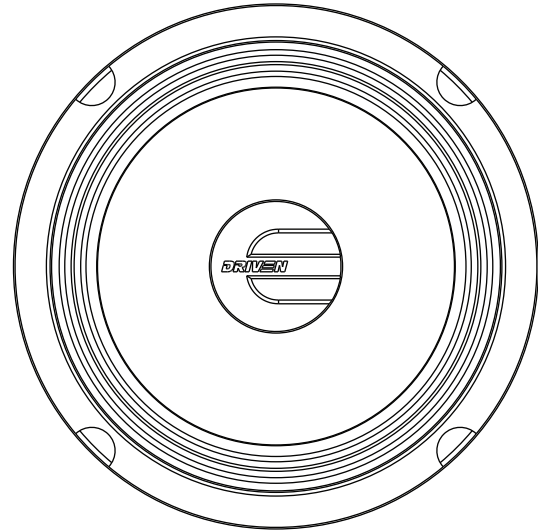

### T/S Parameters

- |   |            |
|---|------------|
| ■ Resonant Frequency (Fs)                   | 91.6Hz     |
| ■ DC Resistance (Re)                        | 8.5        |
| ■ Coil Inductance (Le)                      | 0.00mH     |
| ■ Mechanical Q (Qms)                        | 4.67       |
| ■ Electromagnetic Q (Qes)                   | 0.70       |
| ■ Total Q (Qts)                             | 0.61       |
| ■ Compliance Equivalent Volume (Vas)        | 7.2        |
| ■ Mechanical Compliance of Suspension (Cms) | 0.29mm/N   |
| ■ BL Product (BL)                           | 5.2 N/A    |
| ■ Diaphragm Mass inc. Airload (Mms)         | 10.4 grams |

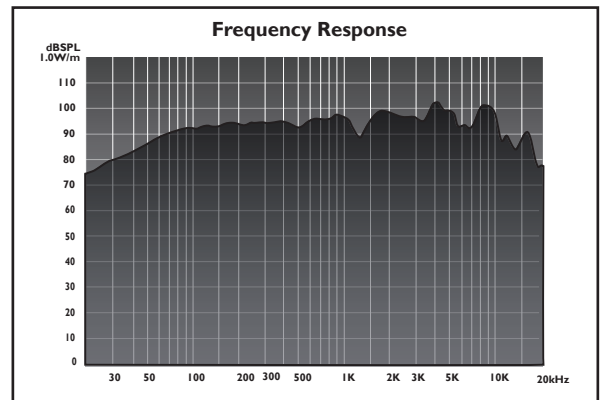

Driven is a Registered Trademark of DB Research L.L.P. | Designed and Engineered in the U.S.A.