



DRM69

6x9" High Performance Mid-Range

CARACTERÍSTICAS




- Cable de la Bobina: Cobre
- Bobina: Poliamida
- Magneto: Ferrita
- Canasta: Acero Estampado
- Cono: Papel
- Orilla del Cono: Tela

ESPECIFICACIONES

- Diametro Nominal de la Canasta: 6x9"
- Impedancia Nominal: 4Ω
- Poder Nominal: 150
- Poder Dinámico: 500
- Resonancia: 119Hz
- Sensibilidad: 97.2
- Diametro de la Bobina: 1.5"

T/S Parameters

- Resonant Frequency (Fs) 99.8Hz
- DC Resistance (Re) 7.9
- Coil Inductance (Le) 0.00mH
- Mechanical Q (Qms) 6.48
- Electromagnetic Q (Qes) 1.11
- Total Q (Qts) 0.95
- Compliance Equivalent Volume (Vas) 12.5
- Mechanical Compliance of Suspension (Cms) 0.18mm/N
- BL Product (BL) 5.0 N/A
- Diaphragm Mass inc. Airload (Mms) 14.0 grams

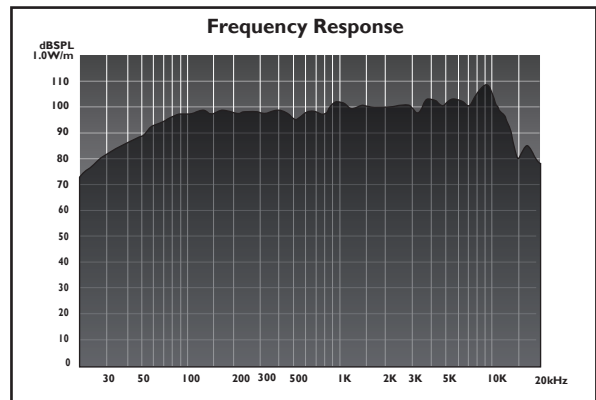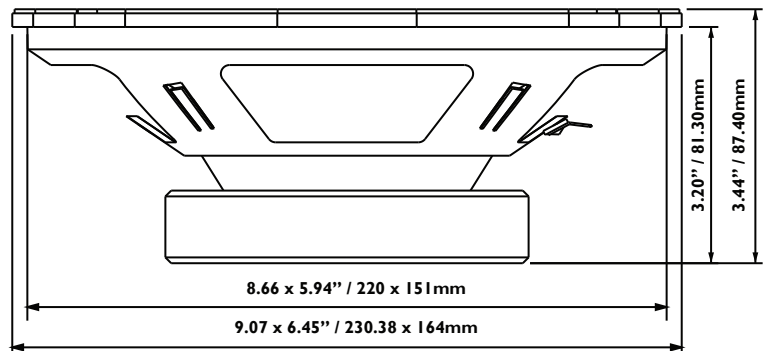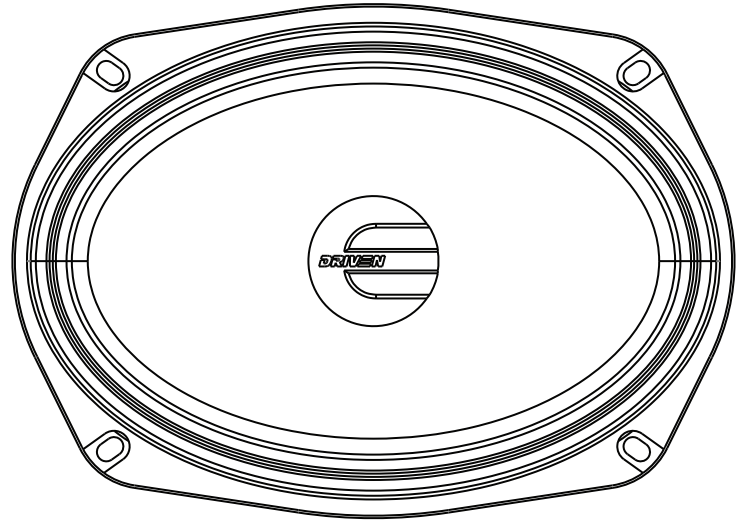

Driven is a Registered Trademark of DB Research L.L.P. | Designed and Engineered in the U.S.A.



DRM69

6x9" High Performance Mid-Range

FEATURES




- Voice Coil Wire: Copper
- Coil: Polyimide
- Magnet: Ferrite
- Basket: Stamped Steel
- Cone: Paper
- Cone Edge: Cloth

SPECIFICATIONS

- Nominal Basket Diameter: 6x9"
- Nominal Impedance: 4Ω
- Nominal Watts: 150
- Dynamic Watts: 500
- Resonance: 119Hz
- Sensitivity: 97.2
- Voice Coil Diameter: 1.5"

T/S Parameters

- Resonant Frequency (Fs) 99.8Hz
- DC Resistance (Re) 7.9
- Coil Inductance (Le) 0.00mH
- Mechanical Q (Qms) 6.48
- Electromagnetic Q (Qes) 1.11
- Total Q (Qts) 0.95
- Compliance Equivalent Volume (Vas) 12.5
- Mechanical Compliance of Suspension (Cms) 0.18mm/N
- BL Product (BL) 5.0 N/A
- Diaphragm Mass inc. Airload (Mms) 14.0 grams

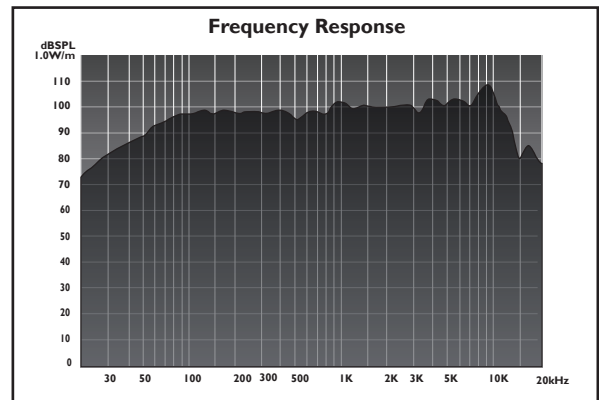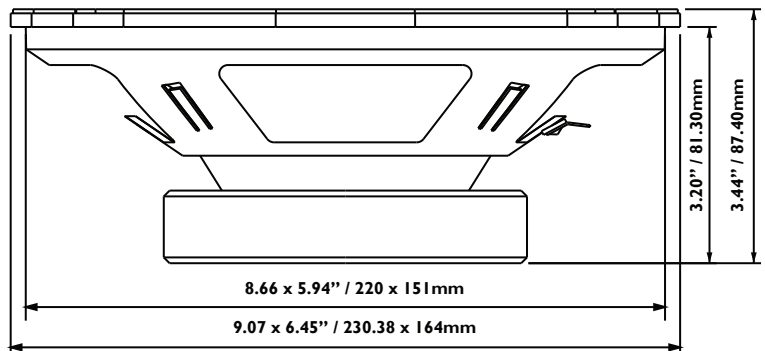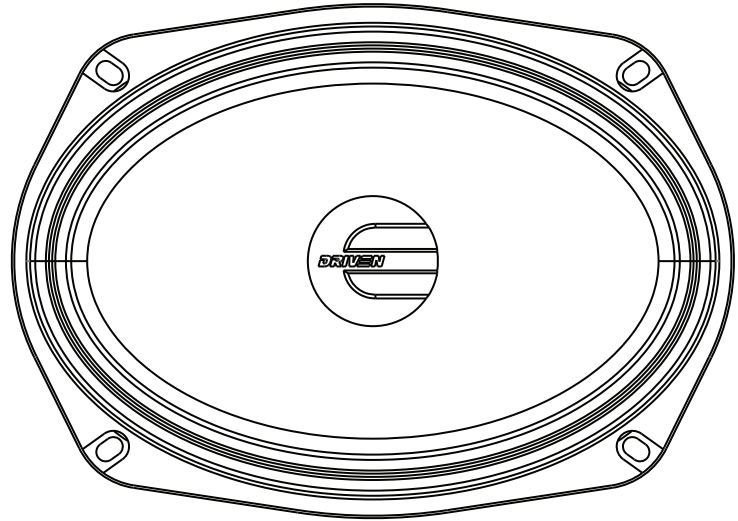

Driven is a Registered Trademark of DB Research L.L.P. | Designed and Engineered in the U.S.A.